

Specifications

T323-H



Chipset	Atheros AR9341 600MHz			
DRAM	DDR 64MByte			
FLASH	8MByte			
IC	SiGe2576L			
Port	10/100Mbps LAN*2			
Speed	11b: 11M, 5.5M, 2M, 1Mbps			
	11g: 54M, 48M, 36M, 24M, 18M, 12M, 9M, 6Mbps			
	11N:6.5M, 13M, 13.5M, 19.5M, 26M, 27M, 39M, 40.5M, 52M, 54M, 58.5M, 65M, 81M, 108M, 121.5M, 135M, 150M, 270M, 300Mbps			
Transmission	DSSS			
Modulation	OFDM/BPSK/QPSK/CCK/DQPSK/DBPSK			
Standard	IEEE802.11n,IEEE802.11g,IEEE802.11b,IEEE802.3u,IEEE802.3af			
Protocol	CSMA/CA,TCP/IP,IPX/SPX,NetBEUI,DHCP,NDIS3,NDIS4,NDIS5			
Channel	2312~2732MHz			
Power dissipation	≤5W			
Power	POE 24V 1A			
RF @25°C±2dB	802.11b	27±2dBm		
	802.11g	6-24Mbps	26±2dB	
		36-48Mbps	25±2dB	
		54Mbps	24±2dB	
	802.11n	HT20	MCS 7	22±2dB
		HT40	MCS 7	22±2dB
Sensitivity	IEEE 802.11b	11Mbps ≤ -85dBm		
	IEEE 802.11g	54Mbps ≤ -70dBm		
	802.11n	HT20	MCS 7 ≤ -65dBm	
		HT40	MCS 7 ≤ -62dBm	
Antenna	Frequency	2300~2800MHz		
	Direction	Horizontal/ Vertical		
	Gain	14DBi		
Management	WEP management	yes		
	SNMP MIB	yes		
	Telnet	yes		
	Serial	yes		
Security	MAC address control	yes		
	Encryption	WEP 64/128bits,WPA,WPA2,802.1x		

Working condition	Working temperature	-30~65°C
	Storage Temperature	-50~80°C
	Humidity (non-condensed)	≤95% (NA)

PCBA


PCBA Model: TD9341P

PCBA size: 107*72*10mm



Antenna


Antenna size: 202*86.3mm

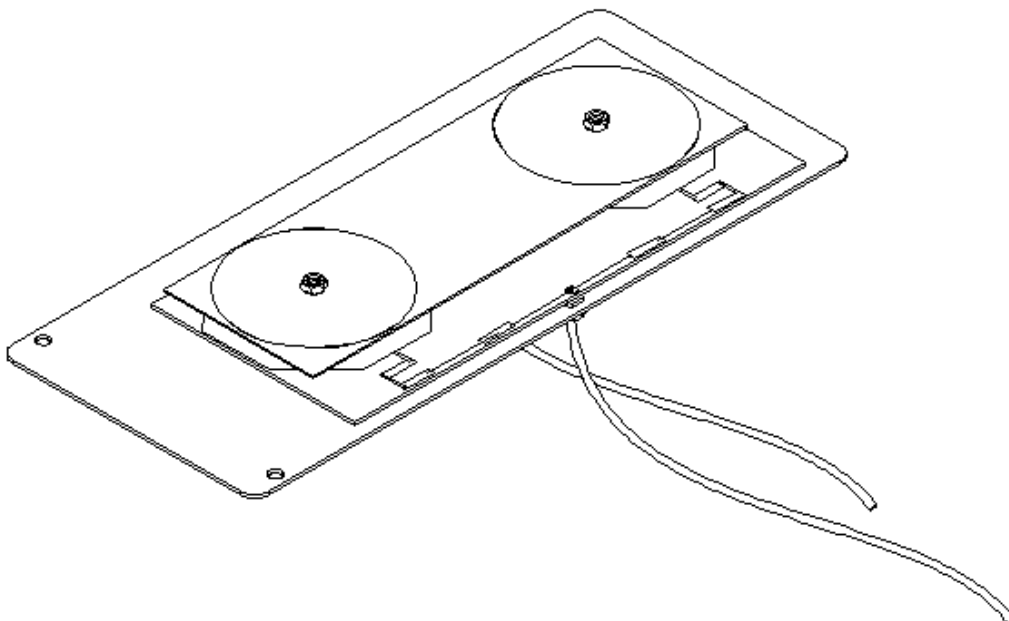

Product size:

255*90*60mm

0.47kg

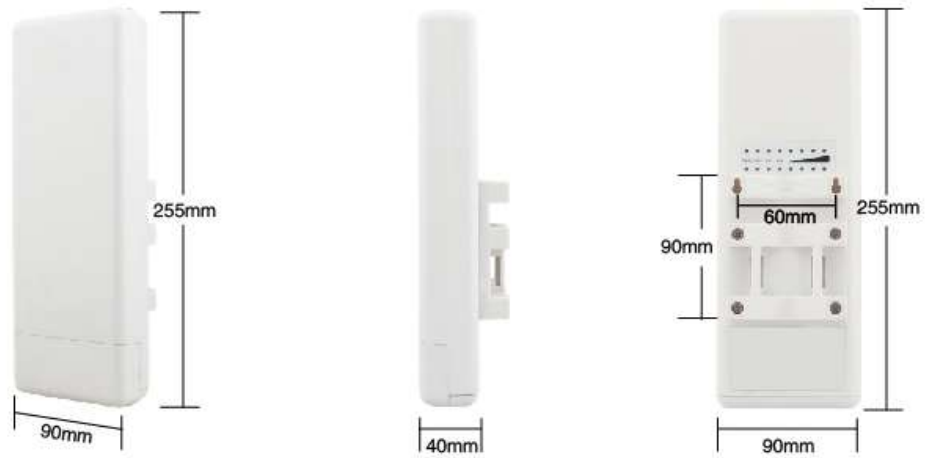

Package List:

1*AP

1*24V POE power

1*Ring

Package Size:

285*100*130mm

0.54kg



Carton Size:

510*420*310mm

9.0kg

QTY:15pcs




Label :

Label size: 70*40mm

Label Material : Sliver Sticker

Label surface: Sliver background and black words

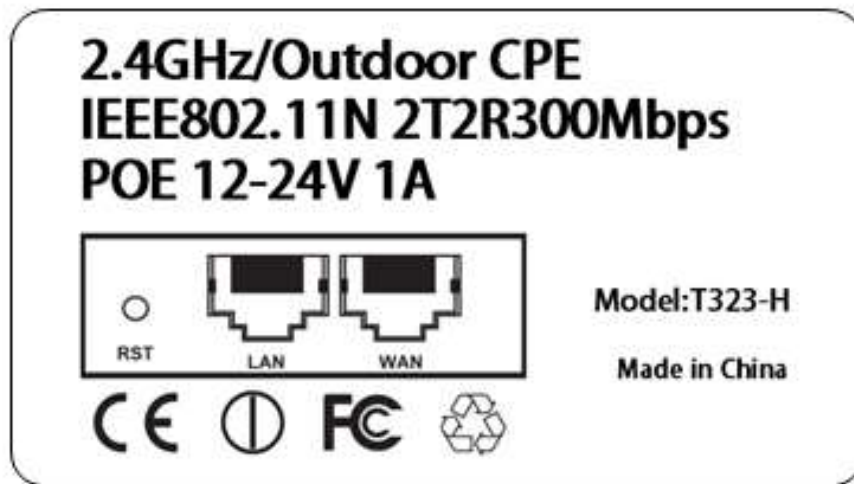

Connection diagram

